

LEA-5 module series

u-blox 5 GPS and GALILEO receivers

Product description

The LEA-5 module series brings the high performance of the u-blox5 positioning engine to the industry standard LEA form factor. These versatile, stand-alone receivers combine an extensive array of features with flexible connectivity options. Their ease of integration results in fast times-to-market for a wide range of automotive, consumer and industrial applications with strict size and cost requirements.



22.4 x 17 x 3 mm

Highlights


- 50-channel u-blox5 engine with over 1 million effective correlators
- < 1 second Time-To-First-Fix for hot and aided starts
- -160 dBm SuperSense[®] sensitivity
- Accelerated startup at weak signals with KickStart feature
- Up to 3 serial interfaces: 1 UART, 1 USB, 1 DDC (I²C compliant). 1 SPI planned.
- Supports AssistNow Online and AssistNow Offline A-GPS services; OMA SUPL compliant
- High immunity to jamming
- Hybrid GPS, GALILEO and SBAS (WAAS, EGNOS, MSAS, GAGAN) engine
- Up to 4 Hz position update rate
- GALILEO-ready (LEA-5H)

Features

Series	Power	Size	Memory	Function					Antenna		Input / Output					
	Voltage range [V]	Thickness [mm]	Programmable (Flash) FW update	Power save mode	KickStart	Dead Reckoning	Raw data	Precision Timing	Antenna supply	Antenna supervisor	UART	USB	SPI	DDC (I ² C compliant)	Reset input	Configuration pin
LEA-5H	2.7 - 3.6	3	•	•	•				•	•	1	1		1	•	
LEA-5S	2.7 - 3.6	3		P	•				•	•	1	1		1	•	1
LEA-5A	2.7 - 3.6	3		P					•	•	1	1		1	•	1
LEA-5Q	2.7 - 3.6	2.4		P	•						1	1	P	1	•	3
LEA-5M	2.7 - 3.6	2.4		P							1	1		1	•	2

P = Planned

Mechanical data

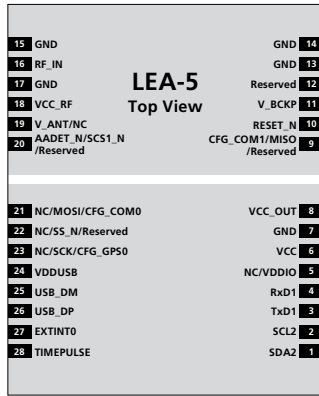

Dimensions
22.4 x 17 x 3 mm

Weight
2.1 g

Electrical data

Power supply	2.7 to 3.6V
Power consumption ¹	69 mW @ 3.0V Power Save mode 129 mW @ 3.0V Eco mode 135 mW @ 3.0V Max. Performance mode
Backup power	1.4 V to 3.6 V, 25µA
Antenna power	External or internal VCC_RF
Antenna supervision	Integrated short-circuit detection and antenna shutdown, open circuit detection is supported with AADET_N input and little external circuitry

Support products

EVK-5H	u-blox 5 Evaluation Kit with KickStart suitable for: LEA-5H, LEA-5S, LEA-5Q
EVK-5P:	u-blox 5 Evaluation Kit with SuperSense [®] suitable for: LEA-5A, LEA-5M

Ordering information

LEA-5H-0	Progr. u-blox 5 GPS Module with KickStart
LEA-5S-0	ROM-based u-blox 5 GPS Module with KickStart
LEA-5A-0	u-blox 5 ROM-based GPS Module
LEA-5Q-0	ROM-based u-blox 5 GPS Module with KickStart
LEA-5M-0	ROM-based u-blox 5 GPS module

Available as samples and tape on reel (250 pieces)

Legal Notice

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.

Copyright © 2009, u-blox AG

Interfaces

Serial interfaces	1 UART 1 USBV2.0 full speed 12 Mbit/s 1 DDC (I ² C compliant) 1 SPI (planned)
Digital I/O	Configurable time pulse 1 EXTINT input 1 Reset 1 config. pin (LEA-5A, LEA-5S)
Serial and I/O voltages	2.7 to 3.6V
Protocols	NMEA, UBX binary

Receiver performance data

Receiver type	50-channel u-blox 5 engine GPS L1 C/A code GALILEO L1 open service (with upgrade) SBAS: WAAS, EGNOS, MSAS, GAGAN	
Max. update rate	4 Hz (ROM version), 2 Hz (Flash version)	
Accuracy ¹	Position	2.5 m CEP
	SBAS	2.0 m CEP
Acquisition ¹	LEA-5H/5S/5Q	LEA-5A/5M
	Cold starts:	29 s 32 s
	Warm starts:	29 s 32 s
	Aided starts ² :	< 1 s < 1 s
	Hot starts:	< 1 s < 3 s
Sensitivity ³	LEA-5H/5S/5Q	LEA-5A/5M
	Tracking:	-160 dBm -160 dBm
	Reacquisition:	-160 dBm -160 dBm
	Cold starts:	-144 dBm -143 dBm
Timing accuracy	RMS	30 ns
	99%	< 60 ns
	Granularity	21 ns
Time pulse	Configurable	0.25 to 1000 Hz
A-GPS	Supports AssistNow Online and AssistNow Offline, OMA SUPL compliant	
Operational limits	Velocity:	500 m/s (972 knots)
	Altitude:	50,000 m
Operating temp.	-40° C to 85° C	
Storage temp.	-40° C to 85° C	

¹ All SV @ -130 dBm

² Dependent on aiding data connection speed and latency

³ Demonstrated with a good active antenna

Contact us

HQ Switzerland +41 44 722 7444 info@u-blox.com	China +86 10 68 133 545 info_cn@u-blox.com
--	--

EMEA +41 44 722 7477 info@u-blox.com	Japan +81 3 5775 3850 info_jp@u-blox.com
--	--

Americas +1 703 483 3180 info_us@u-blox.com	Korea +82 02 542 0861 info_kr@u-blox.com
---	--

APAC – Singapore +65 6734 3811 info_ap@u-blox.com	Taiwan +886 2 2657 1090 info_tw@u-blox.com
---	--